FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

Expires July 31, 1999

970446.11,04

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form. Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME	POLICY NUMBER	
DEPARTMENT OF COMMUNITY of GCONOMIC DEVELOPMENT	- CLICT NOMBER	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER	
16.05 5.) GFF/ERSON STREGF OTHER DESCRIPTION (Lot and Block Numbers. etc.)	OOM ANT MAIO NOMBEA	
LOT 45 COACHMAN PACK ADDITION		
CITY	ZIP CODE	
ALBANY GA. 31701		
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION		
Provide the following from the proper FIRM (See Instructions):		
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4_DATE OF FIRM INDEX 5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)	
130075 0010 C mpc. 18, 1985 A14	(in AO Zones, use depth) / 8 4, 3	
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate		
the community's BFE: feet NGVD (or other FIRM datum-see Section B, Item 7).		
SECTION C BUILDING ELEVATION INFORMATION		
 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of		
4. Elevation reference mark used appears on FIRM: Tes XNo (See Instructions on Page 4)		
5. The reference level elevation is based on: A actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)		
S. The elevation of the lowest grade immediately adjacent to the building is: 1/86 feet NGVD (or other FIRM datum-see Section B, Item 7).		
SECTION D COMMUNITY INFORMATION		
If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:		


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIED O NAME	LICENSE NUMBER (or Affix Seal)	
CERTIFIER'S NAME		
WM. CLAY MILLER	# 2357	
	COMPANY NAME	
ASSOC. V. P. KO	ECK & WOOD, INC.	
ADDRESS	Cit 1	
2588-C N. SLARPEY	BLUD. ALBANG GA. 31761	
SIGNATURE Claus Mul	8 1/97 (912) 435=4843	
Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.		
COMMENTS:		

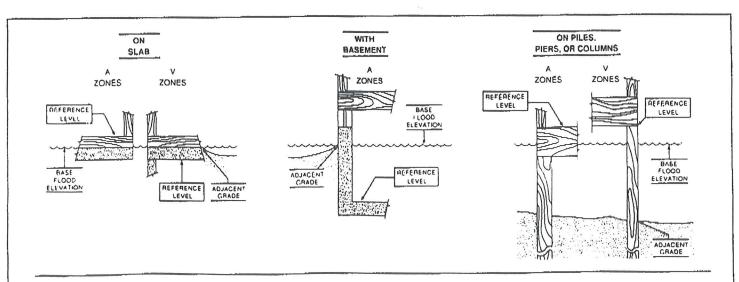

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.